

VULCRAFT/VERCO GROUP ACOUSTICAL PERFORMANCE TEST REPORT

SCOPE OF WORK

ASTM E90 AND ASTM E492 TESTING ON BARE CONCRETE FLOOR

SPECIMEN TYPE

Vulcraft 20 Gage Dove Tail 2.00 Steel Deck with Gypsum Board Ceiling

REPORT NUMBER

H7786.07-113-11-R1

TEST DATE

02/11/18

ISSUE DATE

REVISED DATE

03/22/18

04/04/18

RECORD RETENTION END


02/11/22

PAGES

13

DOCUMENT CONTROL

ATI 00629 (09/19/17) RTTDS-R-AMER-Test-2844 © 2017 INTERTEK

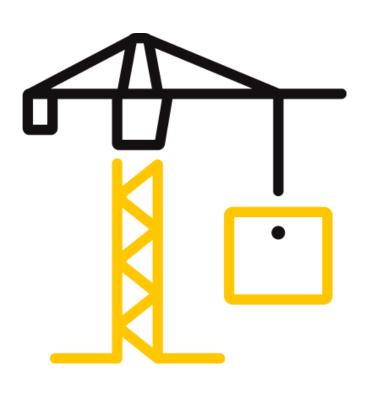



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

REPORT ISSUED TO

VULCRAFT/VERCO GROUP

7205 Gault Avenue North Fort Payne, Alabama 35967

SECTION 1

SCOPE

Intertek Building & Construction (B&C) was contracted by to perform testing in accordance with ASTM E90 AND ASTM E492 on Bare Concrete Floor. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted in the VT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

SECTION 2

SUMMARY OF TEST RESULTS

| DATA FILE NO. | H7786.07 |
|---------------|---------------------|
| SERIES/MODEL: | Bare Concrete Floor |
| STC | 52 |
| IIC | 32 |

Daniel B. Mohler **COMPLETED BY: COMPLETED BY:** Jordan Strybos Project Lead - Acoustical Project Manager - Acoustical TITLE: TITLE: **Testing** Testing **SIGNATURE: SIGNATURE: DATE:** 04/04/18 DATE: 04/04/18

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of ACCREDITED the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 3

TEST METHOD

The specimen was evaluated in accordance with the following:

ASTM E90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

ASTM E413-16, Classification for Rating Sound Insulation

ASTM E492-09(2016)e1, Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine

ASTM E989-06 (2012), Classification for Determination of Impact Insulation Class (IIC)

ASTM E2235-04 (2012), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods

SECTION 4

MATERIAL SOURCE/INSTALLATION

The full test specimen was assembled on the day of testing by B&C. All materials provided by the client were installed on an existing B&C assembly (Vulcraft 20 Gage Dove Tail 2.00 Steel Deck with Gypsum Board Ceiling) utilizing B&C-supplied materials. The assembly was installed in a steel test frame which was installed into the opening between the source and receive rooms in the test chamber. The test frame was isolated from the structure with dense neoprene gasket.

The total weight of the floor/ceiling assembly was 3007.4 kg. B&C will store samples of the test specimen for four years. Photographs of the test specimen are included in the attachments. A drawing of the test specimen is included in the attachments.

B&C will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by B&C for the entire test record retention period.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 5

EQUIPMENT

| INSTRUMENT | MANUFACTURER | MODEL | DESCRIPTION | ASSET # | CAL DATE |
|--|----------------------|--------------------------------|---|----------|----------|
| Data Acquisition Unit | National Instruments | PXI-1033 | Data Acquisition Card | 63763-1 | 06/16 |
| Data Acquisition Unit | National Instruments | PXI-4462 | Input Card | 63763-4 | 07/16 |
| Data Acquisition Unit | National Instruments | PXI-4462 | Input Card | 63763-5 | 06/16 |
| Microphone Calibrator | Norsonic | 1251 | Pistonphone calibrator | INT00127 | 03/17 |
| Receive Room Microphone | PCB Piezotronics | 378C20 | Microphone and Preamplifier | 65617 | 05/17 |
| Receive Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63744 | 05/17 |
| Receive Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63745 | 05/17 |
| Receive Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63746 | 09/17 |
| Receive Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63747 | 05/17 |
| Receive Room Environmental | Comet | T7510 | Temperature and Humidity | 63810 | 10/17 |
| Indicator | Comet | 17510 | Transmitter | 63811 | 10/17 |
| Source Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63738 | 04/17 |
| Source Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63739 | 04/17 |
| Source Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63740 | 04/17 |
| Source Room Microphone | PCB Piezotronics | 378B20 | Microphone and Preamplifier | 63742 | 04/17 |
| Source Room Microphone | PCB Electronics | 378B20 | Microphone and Preamplifier | 63741 | 04/17 |
| Source Room Environmental Indicator | Comet | T7510 | Temperature and Humidity Transmitter | INT00603 | 03/17 |
| Tapping Machine | Norsonic | Nor277 Tapping Machine INT0093 | | INT00936 | 12/17 |

^{*} The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

| VT RECEIVE ROOM VOLUME | 158.86 m³ |
|------------------------|--------------------|
| VT SOURCE ROOM VOLUME | 190 m ³ |

SECTION 6

LIST OF OFFICIAL OBSERVERS

| NAME | COMPANY |
|------------------|--------------|
| Daniel B. Mohler | Intertek B&C |
| Jordan Strybos | Intertek B&C |

Version: 09/19/17 RTTDS-R-AMER-Test-2844 Page 4 of 13



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 7

TEST PROCEDURE

The microphones were calibrated before conducting the tests. The air temperature and relative humidity conditions were monitored and recorded during all measurements.

The airborne transmission loss test was conducted in accordance with the ASTM E90 test method using the single direction method. Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions. Four sound pressure level measurements were made simultaneously in both rooms, at each of five microphone positions.

The impact sound transmission test was conducted in accordance with the ASTM E492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492, and five sound absorption measurements were conducted at each of five microphone positions.

Detailed test procedures, data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

SECTION 8

TEST CALCULATIONS

The STC (Sound Transmission Class) and IIC (Impact Insulation Class) ratings were calculated in accordance with ASTM E413 and ASTM E989, respectively.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 9

TEST SPECIMEN DESCRIPTION

| MATERIAL | DIMENSIONS (mm/inch) | THICKNESS (mm/inch) | MANUFACTURER AND SERIES | QUANTITY | AVERAGE WEIGHT | |
|-----------------|---|------------------------|--|-------------------|-------------------|--|
| Standard 4000 | 3023 by 3632 | 139.7 | N/A | 10.98 m² | 248.08 kg/m² | |
| PSI Concrete | Note: Poured dire | ectly on the floor d | eck and allowed to cure for a | a minimum of 28 d | ays. | |
| Steel Deck | 3023 by 609.6 | 139.7 | 20 Gage Vulcraft DoveTail 2.00 | 10.98 m² | 12.01 kg/m² | |
| | Note: Installed per manufacturer's specifications in a test frame with the top of the concrete flush with the source room. All seams and gaps underneath the deck were plugged with backer rod and sealed with Pecora AC-20 Acoustical Sealant. | | | | | |
| 25 Gage Furring | 3022.6 by 63.6 | 38.1 | ClarkDietrich | 21.16 lin m | 0.98 kg/m | |
| Channel | Note: The furring channels were attached directly to the bottom of the steel deck, spaced 610 mm on center. The measured steel thickness was 1.2 mm. | | | | | |
| Gypsum Panel | 1219 by 3023 | 15.9 | USG SHEETROCK® Brand FIRECODE® C Core | 10.98 m² | 11.91 kg/m² | |
| | Note: Fastened with 25.4 mm fine thread drywall screws on 610 mm centers. Seams and perimeter sealed with Pecora AC-20® Acoustical Sealant and covered with pressure-sensitive tape. | | | | | |



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 10

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS

| TEST DATE DATA FILE NO. CLIENT DESCRIPTION | | ard 4000 PSI Concrete, arkDietrich 25 Gage Fu | | U | |
|--|----------|---|--------|-----------------|--------|
| SPECIMEN AREA | 10.98 m² | Receive Temp. | 17.4°C | Source Temp. | 19.5°C |
| TECHNICIAN | ZPG | Receive Humidity | 59% | Source Humidity | 59% |

| EDEO | BACKGROUND | ADCORDEIGN | SOURCE | RECEIVE | SPECIMEN | 95% | NUMBER |
|----------|------------|---------------|---------------|---------|----------|-----------------|--------------|
| FREQ | SPL | ABSORPTION | SPL | SPL | TL | CONFIDENCE | OF |
| (Hz) | (dB) | m² | (dB) | (dB) | (dB) | LIMIT | DEFICIENCIES |
| 80 | 33.4 | 18.0 | 109 | 70 | 36 | 4.1 | - |
| 100 | 27.5 | 15.3 | 106 | 68 | 37 | 2.6 | - |
| 125 | 25.9 | 13.9 | 105 | 68 | 36 | 1.5 | 0 |
| 160 | 24.2 | 12.8 | 105 | 69 | 36 | 1.3 | 3 |
| 200 | 17.5 | 12.3 | 103 | 69 | 34 | 1.6 | 8 |
| 250 | 15.4 | 11.2 | 102 | 60 | 42 | 0.6 | 3 |
| 315 | 16.5 | 11.2 | 103 | 58 | 46 | 0.7 | 2 |
| 400 | 14.1 | 8.8 | 102 | 54 | 49 | 0.9 | 2 |
| 500 | 16.9 | 8.4 | 101 | 48 | 55 | 0.7 | 0 |
| 630 | 18.2 | 7.8 | 103 | 47 | 58 | 0.5 | 0 |
| 800 | 19.3 | 7.4 | 102 | 44 | 59 | 0.4 | 0 |
| 1000 | 17.6 | 7.3 | 103 | 43 | 62 | 0.7 | 0 |
| 1250 | 16.2 | 7.5 | 102 | 41 | 63 | 0.7 | 0 |
| 1600 | 13.9 | 7.8 | 102 | 40 | 64 | 0.5 | 0 |
| 2000 | 11.5 | 8.8 | 102 | 38 | 65 | 0.4 | 0 |
| 2500 | 8.9 | 9.6 | 101 | 35 | 66 | 0.4 | 0 |
| 3150 | 7.0 | 10.6 | 102 | 33 | 70 | 0.4 | 0 |
| 4000 | 6.5 | 12.0 | 103 | 31 | 72 | 0.4 | 0 |
| 5000 | 6.3 | 14.2 | 103 | 28 | 73 | 0.5 | - |
| 6300 | 6.5 | 18.4 | 97 | 18 | 76 | 0.5 | - |
| 8000 | 6.6 | 24.0 | 96 | 14 | 79 | 0.7 | - |
| 10000 | 6.8 | 30.1 | 91 | 8 | 79 | 0.6 | - |
| STC Rati | ng 52 | (Sound Transm | ission Class, |) | Sum | of Deficiencies | 18 |

Notes:

¹⁾ Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.

²⁾ Specimen TL levels listed in red are potentially limited by the laboratory flanking limit.

⁴⁾ Specimen TL levels listed in green indicate that there has been a filler wall correction applied



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP


Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 11

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS GRAPH

| DATA FILE NO. CLIENT | | 7786.07 ulcraft/Verco Group | | | | |
|----------------------|------------------|--|--------|------------------------|--------|--|
| DESCRIPTION | Deck, 38.1 mm Cl | 139.7 mm Standard 4000 PSI Concrete, 139.7 mm 20 Gage Vulcraft DoveTail 2.00 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel | | | | |
| SPECIMEN AREA | 10.98 m² | Receive Temp. | 17.4°C | Source Temp. | 19.5°C | |
| TECHNICIAN | ZPG | Receive Humidity | 59% | Source Humidity | 59% | |

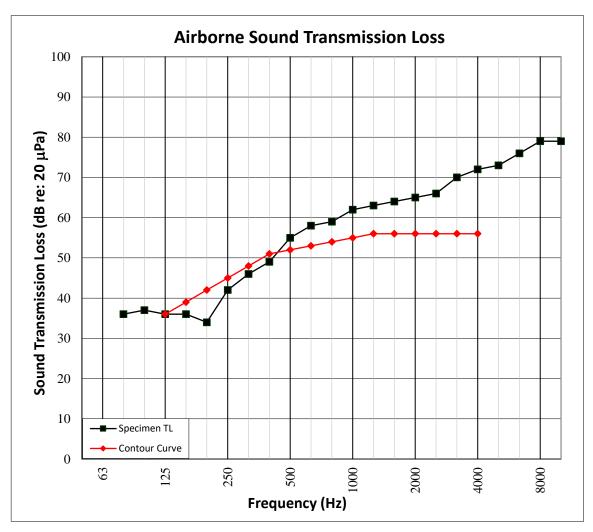



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 12

TEST RESULTS - IMPACT SOUND TRANSMISSION

| SPECIMEN AREA TECHNICIAN | 10.98 m² ZPG | Maximum Temp. Max. Humidity | | Minimum Temp. Min. Humidity | 17.4°C 59% | |
|--------------------------|------------------|--|--|-----------------------------|---------------|--|
| DESCRIPTION | Deck, 38.1 mm Cl | 139.7 mm Standard 4000 PSI Concrete, 139.7 mm 20 Gage Vulcraft DoveTail 2.00 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel | | | | |
| CLIENT | Vulcraft/Verco | Ilcraft/Verco Group Laboratory | | | | |
| DATA FILE NO. | H7786.07 | 17786.07 | | | | |
| TEST DATE | 2/11/2018 | 11/2018 ACCREDITE | | | | |

| FREQ | BACKGROUND | ABSORPTION | NORMALIZED IMPACT SPL | 95% | NUMBER |
|------------|------------|------------------|-----------------------|---------------------|--------------|
| | SPL | 71550111 11011 | | CONFIDENCE | OF |
| (Hz) | (dB) | m² | (dB) | LIMIT | DEFICIENCIES |
| 80 | 38.3 | 18.1 | 61 | 2.2 | - |
| 100 | 35.3 | 16.3 | 63 | 1.3 | 0 |
| 125 | 30.3 | 16.2 | 68 | 1.7 | 0 |
| 160 | 33.0 | 12.3 | 71 | 0.8 | 0 |
| 200 | 28.5 | 12.3 | 72 | 0.9 | 0 |
| 250 | 26.6 | 11.6 | 68 | 0.6 | 0 |
| 315 | 22.7 | 10.9 | 67 | 0.3 | 0 |
| 400 | 18.9 | 8.9 | 66 | 0.5 | 0 |
| 500 | 17.4 | 8.3 | 65 | 0.3 | 0 |
| 630 | 19.4 | 7.7 | 65 | 0.3 | 0 |
| 800 | 21.4 | 7.4 | 66 | 0.3 | 0 |
| 1000 | 19.8 | 7.3 | 66 | 0.3 | 0 |
| 1250 | 16.0 | 7.5 | 67 | 0.2 | 0 |
| 1600 | 14.4 | 7.7 | 68 | 0.1 | 0 |
| 2000 | 12.3 | 8.9 | 70 | 0.2 | 4 |
| 2500 | 9.8 | 9.7 | 70 | 0.2 | 7 |
| 3150 | 7.7 | 10.5 | 68 | 0.2 | 8 |
| 4000 | 7.4 | 12.0 | 64 | 0.3 | - |
| 5000 | 6.6 | 14.3 | 60 | 0.5 | - |
| 6300 | 6.7 | 18.3 | 54 | 0.8 | - |
| 8000 | 6.6 | 23.8 | 43 | 1.2 | - |
| 10000 | 6.8 | 30.0 | 34 | 1.2 | - |
| IIC Rating | 32 | (Impact Insulati | on Class) | Sum of Deficiencies | 19 |

Notes: Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP


Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 13

TEST RESULTS - IMPACT SOUND TRANSMISSION GRAPH

| TEST DATE | 2/11/2018 | ACCREDI | | | | |
|---------------|------------------|--|--------|---------------|--------|--|
| DATA FILE NO. | H7786.07 | 17786.07 | | | | |
| CLIENT | Vulcraft/Verco | Ilcraft/Verco Group Testing Laboratory | | | | |
| DESCRIPTION | Deck, 38.1 mm Cl | 39.7 mm Standard 4000 PSI Concrete, 139.7 mm 20 Gage Vulcraft DoveTail 2.00 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG SHEETROCK® Brand IRECODE® C Core Gypsum Panel | | | | |
| SPECIMEN AREA | 10.98 m² | Maximum Temp. | 17.4°C | Minimum Temp. | 17.4°C | |
| TECHNICIAN | ZPG | Max. Humidity | 59% | Min. Humidity | 59% | |

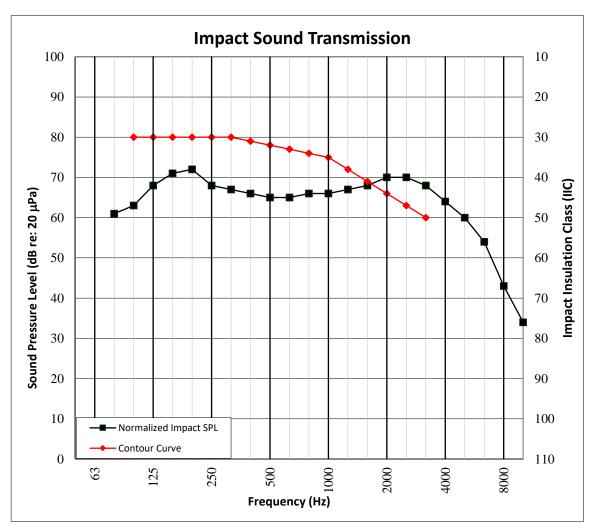



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 14

PHOTOGRAPHS

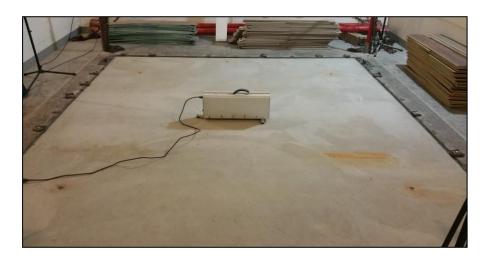


Photo No. 1 Source Room View of Test Specimen Installation

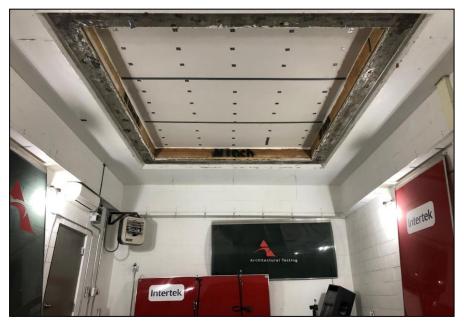


Photo No. 2
Receive Room View of Test Specimen Installation



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 15

DRAWING

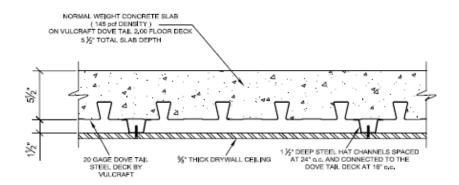

Drawing of Test Specimen (supplied by Client)



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7786.07-113-11-R1

Date: 04/04/18

SECTION 16

REVISION LOG

| REVISION # | DATE | PAGES | DESCRIPTION |
|-------------------|----------|-------------|---|
| RO | 03/22/18 | N/A | Original Report Issue |
| R1 | 04/04/18 | 1, 6-10, 12 | Steel deck name adjusted and drawing updated per client's request |