

VULCRAFT/VERCO GROUP ACOUSTICAL PERFORMANCE TEST REPORT

SCOPE OF WORK

ASTM E90 AND ASTM E492 TESTING ON FUSION HYBRID OVER 2 MM ECOSILENCE UNDERLAYMENT

SPECIMEN TYPE Vulcraft 20 Gage Dove Tail 3.50 Steel Deck with Gypsum Board Ceiling

REPORT NUMBER H7787.08-113-11-R0

TEST DATE 02/17/18

ISSUE DATE 04/05/18

RECORD RETENTION END 02/17/22

PAGES

13

DOCUMENT CONTROL ATI 00629 (09/19/17) RTTDS-R-AMER-Test-2844 © 2017 INTERTEK





130 Derry Court York, PA 17406

Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

REPORT ISSUED TO

VULCRAFT/VERCO GROUP 7205 Gault Avenue North Fort Payne, Alabama 35967

SECTION 1

SCOPE

Intertek Building & Construction (B&C) was contracted by to perform testing in accordance with ASTM E90 AND ASTM E492 on Fusion Hybrid over 2 mm ECOsilence Underlayment. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted in the VT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

SECTION 2

SUMMARY OF TEST RESULTS

DATA FILE NO.	H7787.08
SERIES/MODEL:	Fusion Hybrid over 2 mm ECOsilence Underlayment
STC	55
IIC	53

COMPLETED BY:	Jason P. Taylor	COMPLETED BY:	Jordan Strybos
	Technician II - Acoustical		Project Manager - Acoustical
TITLE:	Testing	TITLE:	Testing
	_		-
SIGNATURE:		SIGNATURE:	
DATE:	04/05/18	DATE:	04/05/18

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of ACCREDITED the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Testing Laboratory



TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 3 TEST METHODS

The specimen was evaluated in accordance with the following:

ASTM E90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

ASTM E413-16, Classification for Rating Sound Insulation

ASTM E492-09(2016)e1, Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine

ASTM E989-06 (2012), Classification for Determination of Impact Insulation Class (IIC)

ASTM E2235-04 (2012), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods

SECTION 4

MATERIAL SOURCE/INSTALLATION

The full test specimen was assembled on the day of testing by B&C. All materials provided by the client were installed on an existing B&C assembly (Vulcraft 20 Gage Dove Tail 3.50 Steel Deck with Gypsum Board Ceiling) utilizing B&C-supplied materials. The assembly was installed in a steel test frame which was installed into the opening between the source and receive rooms in the test chamber. The test frame was isolated from the structure with dense neoprene gasket.

The total weight of the floor/ceiling assembly was 3349.7 kg. B&C will store samples of the test specimen for four years. Photographs of the test specimen are included in the attachments. A drawing of the test specimen is included in the attachments.

B&C will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by B&C for the entire test record retention period.



Total Quality. Assured.

Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 5

EQUIPMENT

INSTRUMENT	JMENT MANUFACTURER MODEL DESCRIPTION		DESCRIPTION	ASSET #	CAL DAT	ΓE
Data Acquisition Unit	National Instruments	PXI-1033	Data Acquisition Card	63763-1	06/16	*
Data Acquisition Unit	National Instruments	PXI-4462	Input Card	63763-4	07/16	*
Data Acquisition Unit	National Instruments	PXI-4462	Input Card	63763-5	06/16	*
Microphone Calibrator	Norsonic	1251	Pistonphone calibrator	INT00127	03/17	
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65617	05/17	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63744	05/17	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63745	05/17	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63746	09/17	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63747	05/17	
Receive Room Environmental	Comot	T7510	Temperature and Humidity	63810	10/17	
Indicator	Comet	17510	Transmitter	63811	10/17	
Source Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63738	04/17	
Source Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63739	04/17	
Source Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63740	04/17	
Source Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63742	04/17	
Source Room Microphone	PCB Electronics	378B20	Microphone and Preamplifier	63741	04/17	
Source Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter INT00603		03/17	
Tapping Machine	Norsonic	Nor277	Tapping Machine INT00936		12/17	

* The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

VT RECEIVE ROOM VOLUME	158.86 m³
VT SOURCE ROOM VOLUME	190 m ³

SECTION 6

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Jason P. Taylor	Intertek B&C
Jordan Strybos	Intertek B&C



TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 7 TEST PROCEDURE

The microphones were calibrated before conducting the tests. The air temperature and relative humidity conditions were monitored and recorded during all measurements.

The airborne transmission loss test was conducted in accordance with the ASTM E90 test method using the single direction method. Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions. Four sound pressure level measurements were made simultaneously in both rooms, at each of five microphone positions.

The impact sound transmission test was conducted in accordance with the ASTM E492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492, and five sound absorption measurements were conducted at each of five microphone positions.

Detailed test procedures, data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

SECTION 8 TEST CALCULATIONS

The STC (Sound Transmission Class) and IIC (Impact Insulation Class) ratings were calculated in accordance with ASTM E413 and ASTM E989, respectively.



TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 9

TEST SPECIMEN DESCRIPTION

MATERIAL	DIMENSIONS (mm/inch)	THICKNESS (mm/inch)	MANUFACTURER AND SERIES	QUANTITY	AVERAGE WEIGHT				
Luxury Vinyl	1219 by 177.8	4.0	Derr Flooring Fusion Hybrid	10.98 m²	6.74 kg/m²				
Plank	Note: Loose laid	-	-	-					
Rubber	3023 by 1219	2.0	ECOsilence	10.98 m²	1.86 kg/m²				
Underlayment	Note: Loose laid		•						
Standard 4000	3023 by 3632	152.4	N/A	10.98 m²	270.63 kg/m²				
PSI Concrete	Note: Poured directly on the floor deck and allowed to cure for a minimum of 28 days.								
	3023 by 609.6	152.4	20 Gage Vulcraft Dove Tail 3.50	10.98 m²	12.01 kg/m²				
Steel Deck	Note: Installed per manufacturer's specifications in a test frame with the top of the concrete flush with the source room. All seams and gaps underneath the deck were plugged with backer rod and sealed with Pecora AC-20 Acoustical Sealant.								
25 Gage Furring	3023 by 63.6	38.1	ClarkDietrich	21.16 lin m	0.98 kg/m				
Channel	Note: The furring channels were attached directly to the bottom of the steel deck, spaced 610 mm on center. The measured steel thickness was 1.2 mm.								
	1219 by 3023	15.9	USG SHEETROCK [®] Brand FIRECODE [®] C Core	10.98 m²	11.91 kg/m²				
Gypsum Panel		Note: Fastened with 25.4 mm fine thread drywall screws on 610 mm centers. Seams and perimeter sealed with Pecora AC-20 [®] Acoustical Sealant and covered with pressure-sensitive tape.							



TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 10

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS



TEST DATE DATA FILE NO. CLIENT	2/17/2018 H7787.08 Vulcraft/Verco (ACCREDITED Testing Laboratory							
DESCRIPTION	Underlayment, 15 Tail 3.50 Steel Dee	mm Derr Flooring Fusion Hybrid Luxury Vinyl Plank, 2 mm ECOsilence Rubber Inderlayment, 152.4 mm Standard 4000 PSI Concrete, 152.4 mm 20 Gage Vulcraft Dove fail 3.50 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG HEETROCK® Brand FIRECODE® C Core Gypsum Panel							
SPECIMEN AREA	10.98 m²	0.98 m ² Receive Temp. 18.9°C Source Temp. 18							
TECHNICIAN	JPT	Receive Humidity	57%	Source Humidity	57%				

	BACKGROUND	ADCODDTION	SOURCE	RECEIVE	SPECIMEN	95%	NUMBER
FREQ	SPL	ABSORPTION	SPL	SPL	TL	CONFIDENCE	OF
(Hz)	(dB)	m²	(dB)	(dB)	(dB)	LIMIT	DEFICIENCIES
80	28.2	17.4	109	70	37	3.0	-
100	28.6	17.0	106	69	35	1.6	-
125	27.3	11.5	106	69	37	1.8	2
160	22.4	12.3	107	70	36	1.1	6
200	20.5	11.1	105	67	38	1.4	7
250	30.5	10.8	105	60	44	1.0	4
315	18.1	9.9	106	59	47	0.6	4
400	19.4	8.6	105	55	51	0.5	3
500	25.5	7.8	103	52	52	0.4	3
630	16.4	7.5	104	53	53	0.5	3
800	16.7	7.2	103	48	57	0.6	0
1000	15.3	7.1	104	44	62	0.4	0
1250	12.6	7.2	104	41	65	0.3	0
1600	9.6	7.6	105	40	67	0.4	0
2000	8.0	8.6	104	38	67	0.4	0
2500	7.1	9.5	102	36	67	0.3	0
3150	7.2	10.6	103	33	70	0.4	0
4000	8.0	12.5	104	32	72	0.4	0
5000	8.8	14.6	104	28	74	0.5	-
6300	9.7	18.9	97	18	77	0.6	-
8000	10.6	24.9	97	13	80	0.6	-
10000	11.6	31.2	92	10	77	0.7	-
STC Rati	ng 55	(Sound Transm	ission Class,)	Sum	of Deficiencies	32

Notes:

- 1) Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.
 - 2) Specimen TL levels listed in red are potentially limited by the laboratory flanking limit.
- 3) Specimen TL levels listed in *blue* indicate the lower limit of the transmission loss.
- 4) Specimen TL levels listed in green indicate that there has been a filler wall correction applied



TEST REPORT FOR VULCRAFT/VERCO GROUP


Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 11

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS GRAPH

ACCREDITED
Testing Laboratory

TEST DATE	2/17/2018				ACCREDITED				
DATA FILE NO.	H7787.08	Testing							
CLIENT	Vulcraft/Verco	Vulcraft/Verco Group							
DESCRIPTION	Underlayment, 15 Tail 3.50 Steel De	mm Derr Flooring Fusion Hybrid Luxury Vinyl Plank, 2 mm ECOsilence Rubber Inderlayment, 152.4 mm Standard 4000 PSI Concrete, 152.4 mm 20 Gage Vulcraft Dove ail 3.50 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG HEETROCK® Brand FIRECODE® C Core Gypsum Panel							
SPECIMEN AREA	10.98 m²	D.98 m ² Receive Temp. 18.9°C Source Temp. 18							
TECHNICIAN	JPT	Receive Humidity	57%	Source Humidity	57%				

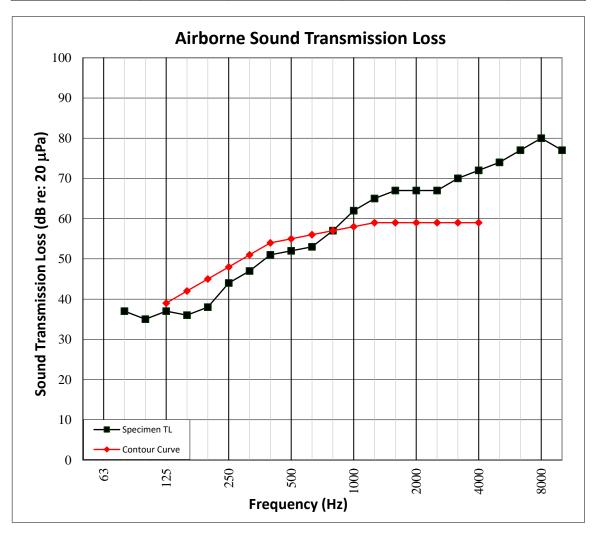



TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 12

TEST RESULTS - IMPACT SOUND TRANSMISSION

ACCREDITED
Testing Laboratory

TEST DATE	2/17/2018				ACCREDITED				
DATA FILE NO.	H7787.08	Testing							
CLIENT	Vulcraft/Verco	Vulcraft/Verco Group							
DESCRIPTION	Underlayment, 15 Tail 3.50 Steel Dee	I mm Derr Flooring Fusion Hybrid Luxury Vinyl Plank, 2 mm ECOsilence Rubber Jnderlayment, 152.4 mm Standard 4000 PSI Concrete, 152.4 mm 20 Gage Vulcraft Dove ail 3.50 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG HEETROCK® Brand FIRECODE® C Core Gypsum Panel							
SPECIMEN AREA	10.98 m²	.0.98 m ² Maximum Temp. 18.9°C Minimum Temp. 18.							
TECHNICIAN	JPT	Max. Humidity	57%	Min. Humidity	56%				

FREQ	BACKGROUND SPL	ABSORPTION	NORMALIZED IMPACT SP	95% CONFIDENCE	NUMBER OF
(Hz)	(dB)	m²	(dB)	LIMIT	DEFICIENCIES
80	29.5	17.3	62	2.5	-
100	28.3	19.2	65	1.3	6
125	25.5	11.7	64	1.1	5
160	22.7	12.2	66	1.0	7
200	21.6	10.6	66	0.4	7
250	29.7	10.9	62	0.9	3
315	17.8	10.5	61	0.4	2
400	19.2	8.7	57	0.3	0
500	26.5	7.7	53	0.3	0
630	17.4	7.4	48	0.4	0
800	18.1	7.2	50	0.4	0
1000	17.7	7.0	46	0.4	0
1250	14.5	7.2	40	0.4	0
1600	12.5	7.5	33	0.3	0
2000	9.6	8.6	27	0.4	0
2500	7.5	9.6	22	0.7	0
3150	7.3	10.7	15	0.7	0
4000	8.0	12.5	12	0.6	-
5000	8.8	14.4	12	0.3	-
6300	9.7	18.9	13	0.3	-
8000	10.6	24.8	14	0.4	-
10000	11.5	31.9	16	0.5	-
IIC Ratii	<mark>ng</mark> 53	(Impact Insulat	tion Class)	Sum of Deficiencies	30

Notes: Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.



TEST REPORT FOR VULCRAFT/VERCO GROUP


Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 13

TEST RESULTS - IMPACT SOUND TRANSMISSION GRAPH

ACCREDITED
Testing Laboratory

TEST DATE	2/17/2018				
DATA FILE NO. H7787.08				- ACCREDITED	
CLIENT	Vulcraft/Verco Group			Laboratory	
DESCRIPTION	4 mm Derr Flooring Fusion Hybrid Luxury Vinyl Plank, 2 mm ECOsilence Rubber Underlayment, 152.4 mm Standard 4000 PSI Concrete, 152.4 mm 20 Gage Vulcraft Dove Tail 3.50 Steel Deck, 38.1 mm ClarkDietrich 25 Gage Furring Channel, 15.9 mm USG SHEETROCK [®] Brand FIRECODE [®] C Core Gypsum Panel				
SPECIMEN AREA	10.98 m²	Maximum Temp.	18.9°C	Minimum Temp.	18.9°C
TECHNICIAN	JPT	Max. Humidity	57%	Min. Humidity	56%

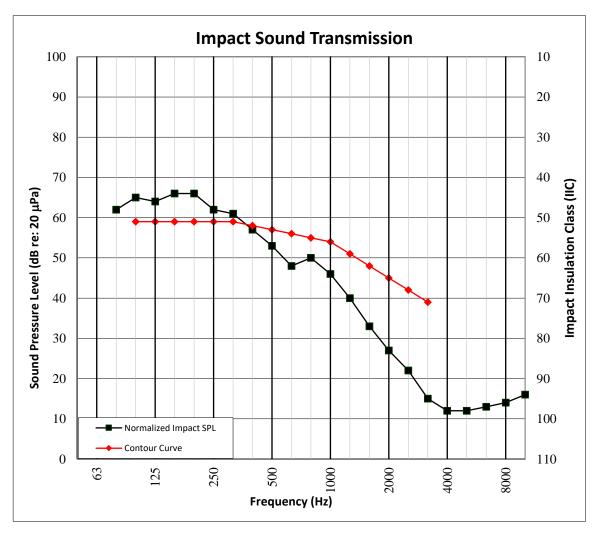



130 Derry Court York, PA 17406

Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 14

PHOTOGRAPHS



Photo No. 1 Source Room View of Test Specimen Installation



Photo No. 2 Receive Room View of Test Specimen Installation



130 Derry Court York, PA 17406

Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building


stal gaanty. Assured.

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 15

DRAWING

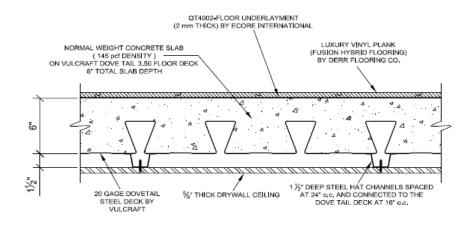

Drawing of Test Specimen (supplied by Client)



Total Quality. Assured.

Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR VULCRAFT/VERCO GROUP

Report No.: H7787.08-113-11-R0 Date: 04/05/18

SECTION 16

REVISION LOG

REVISION #	DATE	PAGES	DESCRIPTION
RO	04/05/18	N/A	Original Report Issue